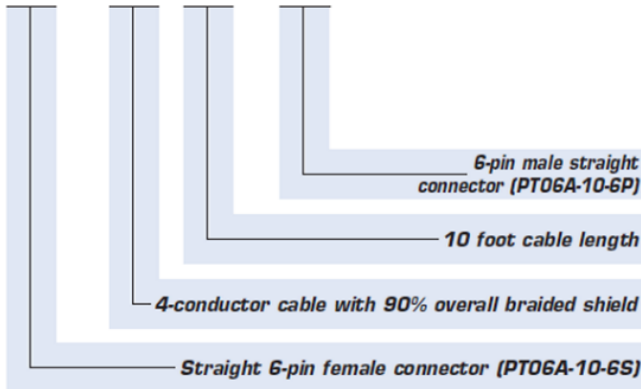# Accessories

SAMPLE ORDERING INFORMATION
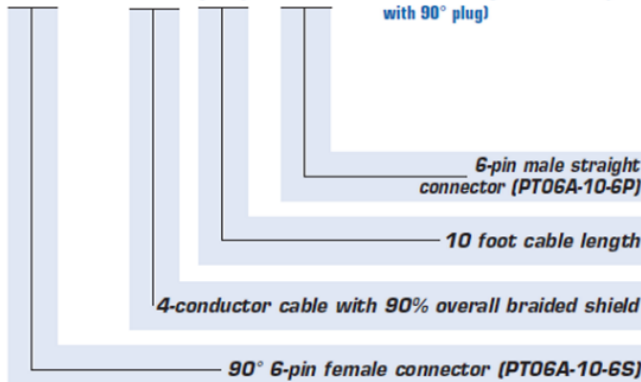
Bx6SM - BeN4 (10) - Bx6PM (Interconnecting cable assembly)

- 6-pin male straight connector (PT06A-10-6P)
- 10 foot cable length
- 4-conductor cable with 90% overall braided shield
- Straight 6-pin female connector (PT06A-10-6S)

PT06A-10-6P
PT06A-10-6S

Bx6SM - BeN4 (50) (Load cell cable with tinned pig tail ends)

- 50 foot cable length
- 4-conductor cable with 90% overall braided shield
- Straight 6-pin female connector (PT06A-10-6S)

RED
GRN
WHT
BLK

PT06A-10-6S
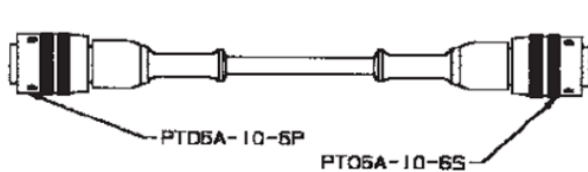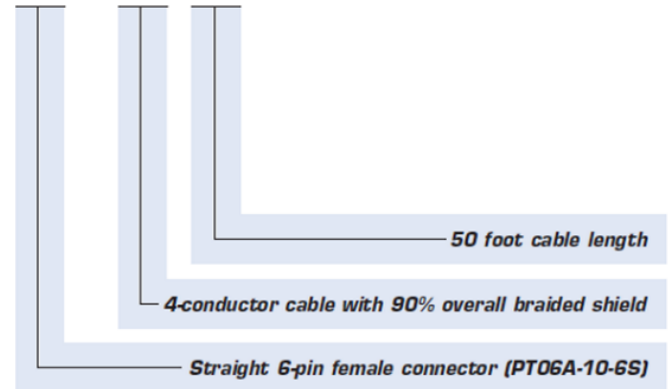
Bx6SML - BeN4 (10) - Bx6PM (Interconnecting cable assembly with 90° plug)

- 6-pin male straight connector (PT06A-10-6P)
- 10 foot cable length
- 4-conductor cable with 90% overall braided shield
- 90° 6-pin female connector (PT06A-10-6S)

PT06A-10-6P
PT06A-10-6S

A	RED (E+)	A
B	GRN (S+)	B
C	WHT (S−)	C
D	BLK (E−)	D
E		

Bx6SML - BeN4 (50) (Tinned pig tail ends with 90° plug)

- 50 foot cable length
- 4-conductor cable with 90% overall braided shield
- 90° 6-pin female connector (PT06A-10-6S)

RED
GRN
WHT
BLK

PT06A-10-6S

RED (E+)	A
GRN (S+)	B
WHT (S−)	C
BLK (E−)	D